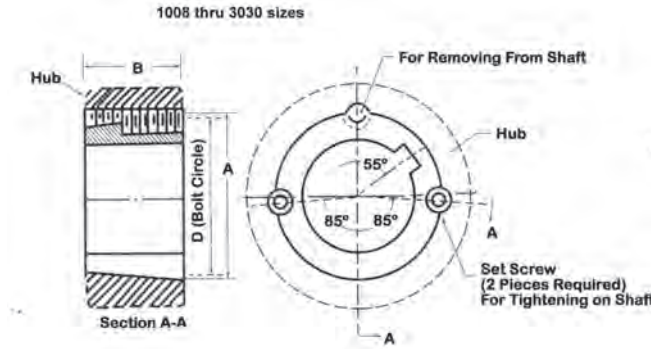
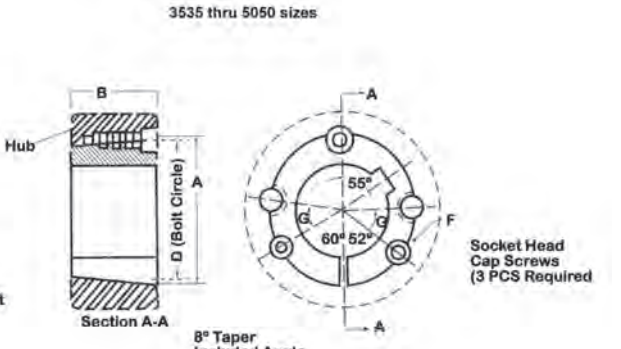


The Taper Lock Bush is a tried and proven method for fixing a driven device to a shaft. The simple design allows for easy maintenance, it is a simple easy-on, easy-off process.

Chains & Accessories stocks a range of items that are used in conjunction with Taper Lock Bushes, including: sprockets, pulleys and couplings.

Taper Lock Bushes come in a variety of bore sizes, in both metric and imperial.

1008 thru 3030 sizes						3535 thru 5050 sizes					
											
Bush	A	B	D	G	Set Crews Dia. x Len.						
1008	35.2	22.3	33.73		1/4 x 1/2						
1108	38.38	22.3	36.92		1/4 x 1/2						
1210	47.62	25.4	44.44		3/8 x 5/8						
1215	47.62	38.1	44.44		3/8 x 5/8						
1610	57.15	25.4	53.97		3/8 x 5/8						
1615	57.15	38.1	53.97		3/8 x 5/8						
2012	69.85	31.8	66.68		7/16 x 7/8						
2017	69.85	44.5	66.68		7/16 x 7/8						
2517	85.73	44.5	82.55		1/2 x 1						
2525	85.73	63.5	82.56		1/2 x 1						
3020	107.96	50.8	101.6		5/8 x 1-1/4						
3030	107.96	76.2	101.6		5/8 x 1-1/4						
3525	127	63.5	122.68	40	1/2 x 1-1/2						
3535	127	89	122.68	40	1/2 x 1-1/2						
4030	146.05	76.2	140.72	40	5/8 x 1-1/2						
4040	146.05	101.5	140.72	40	5/8 x 1-3/4						
4545	161.93	114.3	155.7	40	3/4 x 2						
5050	177.8	127	170.69	37	7/8 x 2-1/4						

Note: 1008 – 3030 require two screws  
3535 – 5050 requires three screws