


Cat.6 12Port 10" Patch Panel (UTP) / Krone Type

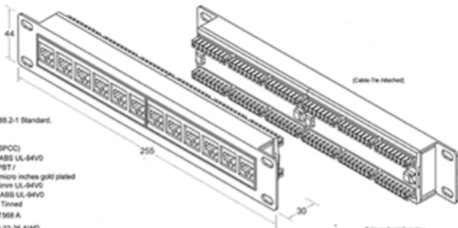

Performance:

Meets Cat.6 EIA/TIA 568.2-1 Standard.

Materials:

Panel : Metallic Panel (SPCC)

Plastic Body : Fireproof ABS UL-94V0

RJ-45 Jack : Housing-PBT /
SPCC 50 micro inches gold plated

PCB : FR-4 / 1.6mm UL-94V0

IDC Body : Fireproof ABS UL-94V0

IDC Pin : Bronze & Tinned

Label Color Code : T998 A

IDC Description : For 22-26 AWG.

For 110 or Krone punch-down Tool

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps.

DC Resistance : 0.1 ohm (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 25 Cycles (min.)

RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

Marking:

Printed Letter:

Cat.6



AMDEX

N3574

Color coding information

T998A

1---GRN

2---GN

3---VIO

4---BL

5---WHT

6---OR

7---VIO

8---BL

DRAW NO	APPV	G.O.	ITEM NO	DA10-12P-C6
DATE	CHECK		DATE	
SCALE	DESIGN		TOLERANCE	- 0.1 - X 0.2 - XX 0.10
ROYCECROSSGROUP				