


# Cat.6 8Port 10" Patch Panel (UTP) / Krone Type

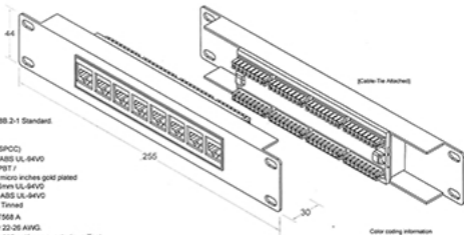

## Performance:

Meets Cat 6 EIA/TIA 568B.2-1 Standard.

## Materials:

Panel : Metallic Panel (SPCC)

Plastic Body : Fireproof ABS UL-94V0

RJ-45 Jack : Housing-PBT /  
8P8C 50 micro inches gold plated

PCB : FR-4 / 1.6mm UL-94V0

IDC Body : Fireproof ABS UL-94V0

IDC Pin : Bronze & Tinned

Label Color Code : T568 A

IDC Description : For 22-26 AWG.

For 110 or Krone punch-down Tool

## Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps.

DC Resistance : 0.1 ohm (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

## Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)

RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C

## Marking:

Printed Letter:

Cat.6



AMDEX

N3674

## Color coding information

T568A

1—BROWN

2—ORANGE

3—GREEN

4—BLUE

5—SLATE

6—RED

7—BLACK

8—WHITE

DRAW NO			ITEM NO	DA10-8P-C6
APPR	G.O.	CUSTOMER		
CHKD	CHECK	DATE		
SCALE	DESIGN	TOLERANCE	- E 1 - X 1 0 2 - KX 1 0 15	
<b>ROYCECROSSGROUP</b>				