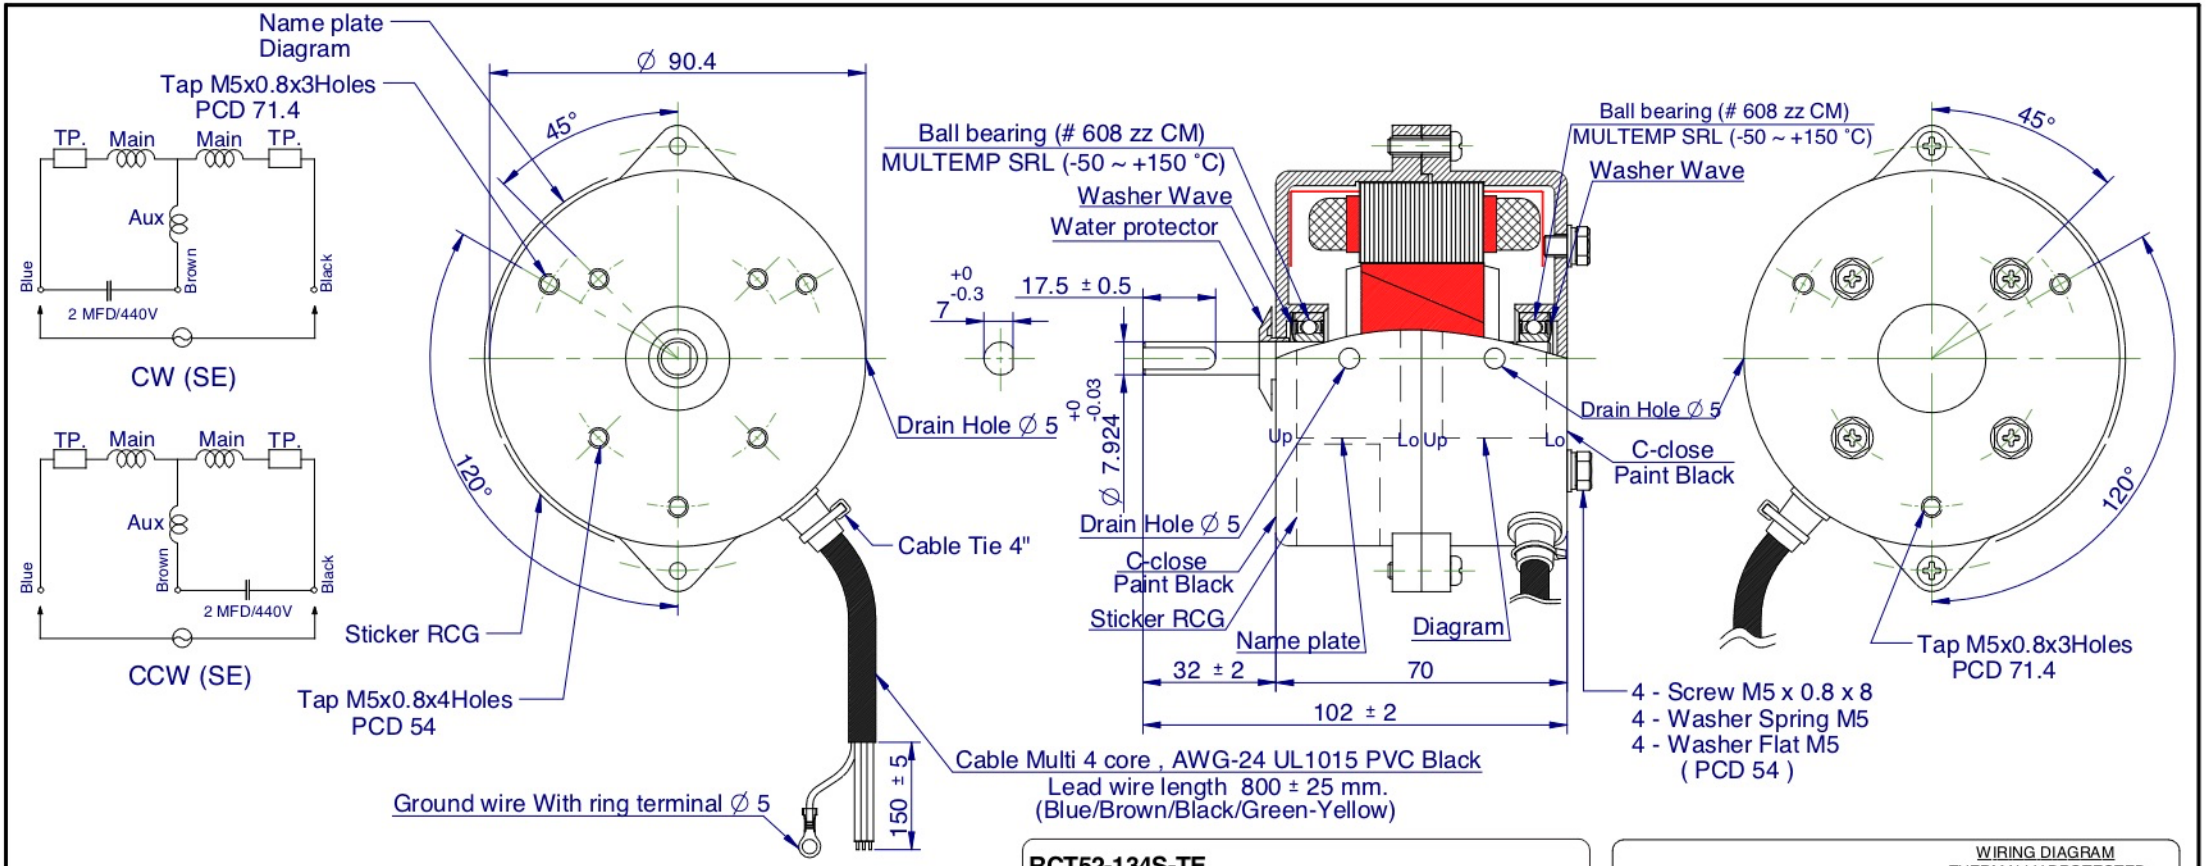

RCG
ELECTRIC MOTOR GROUP

STICKER RCG

RCT52-134S-TE					
0.01kW , 4P , 0.15Amp	Cap.	2 mfd	Frame	32
240V , 1Ph , 50Hz	Rating	Cont	Mounting	Std.mt
Rpm 1350	Ins. Class	B	Serial No.	xxxxxxxxxx

NAMEPLATE

WARNING

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

WIRING DIAGRAM
THERMALLY PROTECTED



DIAGRAM

DATA TEST NO.			W443-2178-SL
APPLICABLE MODEL			PM315091
SPECIFICATION	NO. OF PHASE		1 PHASE
	NO. OF POLE		4 P.
	RATED RPM.	50Hz	1350
		60Hz	---
	VOLTAGE		240 V.
	CURRENT		0.15 A.
	OUTPUT		13 W.
	EFFICIENCY		30.2 %
WINDING RESISTANCE (REF. 20°)	M COIL		456.72 Ω
	S COIL		478.61 Ω
	SP1 COIL		--- Ω
	SP2 COIL		--- Ω
THERMAL PROTECTOR			BR-A1D 130°C Refer P/N.R330-0872
INSULATION CLASS			B
METHOD OF COOLING			A.O.M.
DEGREE OF PROTECTION			IP54
WEIGHT			1.55 KGS.

Remark : Part No. Capacitor W330-6442

Notes :
1. After the motor is complete, applied rust proof oil at shaft end.
2. The tensile strength of each lead wire at least 4 Kgs.
3. The runout of the shaft end circumference 0.08 mm.

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

THIRD ANGLE PROJECTION

NON SCALES

FINISH:	DESCRIPTION:	REFER TO :
ASSEMBLY	MOTOR OUTLINE	ECN No.7321 ECN No.7495 ECN No.7759

CUSTOMER:	Q'TY	APPLICATION	Group Code:
ROYCECROSS	1	INDOOR MOTOR	FF52B