


DATA TEST NO.		W443-2177-SL		
APPLICABLE MODEL		PM4120260		
SPECIFICATION	NO. OF PHASE	1 PHASE		
	NO. OF POLE	4 P.		
	RATED RPM.	50Hz	1300	
		60Hz	---	
	VOLTAGE	240 V.		
	CURRENT	0.50 A.		
OUTPUT	40 W.			
EFFICIENCY	41.4 %			
WINDING RESISTANCE	M COIL	135.67 Ω		
	S COIL	344.97 Ω		
	SP1 COIL	--- Ω		
	SP2 COIL	--- Ω		
(REF. 20")				
THERMAL FUSE		BR-A1D 130°C Refer P/N.R330-0872		
INSULATION CLASS		B		
METHOD OF COOLING		A.O.M.		
DEGREE OF PROTECTION		IP54		
WEIGHT		1.54 KGS.		



STICKER RCG

RCT52-404DS-TE			
0.04kW , 4P , 0.5Amp	Cap.	2 mfd	Frame 32
240V , 1Ph , 50Hz	Rating	Cont	Mounting Std.mt
Rpm 1300	Ins. Class	B	Serial No. xxxxxxxxxx

NAMEPLATE

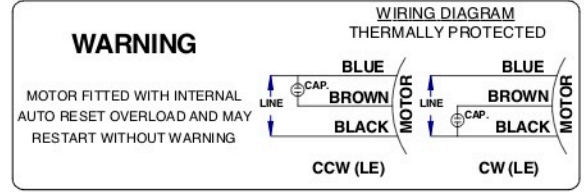


DIAGRAM

Remark : Part No. Capacitor W330-6442

Notes :

1. After the motor is complete, applied rust proof oil (Caltex oil) at shaft end.
2. The tensile strength of each lead wire at least 4 Kgs.
3. The runout of the shaft end circumference 0.08 mm.



NON SCALES

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

FINISH:	DESCRIPTION:		REFER TO :
ASSEMBLY	MOTOR OUTLINE		ECN No.7321 ECN No.7495 ECN No.7759
ROYCECROSS	Q'TY	APPLICATION	Group Code:
	1	INDOOR MOTOR	FF52B