


DATA TEST NO.	W443-2287-SL	
APPLICABLE MODEL	PM4120277	
SPECIFICATION	NO. OF PHASE	1 PHASE
	NO. OF POLE	4 P.
	RATED RPM.	50Hz 1350/1220/1050 60Hz ---
	VOLTAGE	240 V.
WINDING RESISTANCE	CURRENT	0.50 A.
	OUTPUT	40 W.
	M COIL	86.94 Ω
	S COIL	204.19 Ω
(REF. 20")	SP1 COIL	51.19 Ω
	SP2 COIL	51.19 Ω
THERMAL PROTECTOR	17AM - 150°C Refer P/N.R330-0035	
INSULATION CLASS	B	
METHOD OF COOLING	A.O.M.	
DEGREE OF PROTECTION	IP21	
WEIGHT	--- KGS.	

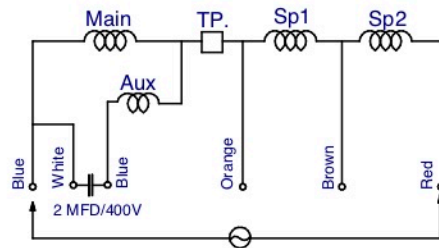

- Notes :
1. After the motor is complete, applied rust proof oil (Caltex oil) at shaft end.
  2. The tensile strength of each lead wire at least 4 Kgs.
  3. The runout of the shaft end circumference 0.18 mm.

<b>RCT74-404DS-ODP-C02</b>			
0.04kW , 4P , 0.50Amp	Cap. 2 mfd	Frame 42	
240V , 1Ph , 50Hz	Rating Cont	Mounting Cradle	
Rpm 1350/1220/1050	Ins. Class B	Serial No. DDMMYYXXXX	

**WARNING**

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

WIRING DIAGRAM THERMALLY PROTECTED BLUE

**NAMEPLATE**

**DIAGRAM**

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

THIRD ANGLE PROJECTION	FINISH:	DESCRIPTION:	REFER TO :
	ASSEMBLY	MOTOR OUTLINE	QR3109 ECN No.8354
NON SCALES	Q'TY	APPLICATION	Group Code:
	1	INDOOR MOTOR	FF74B