


DATA TEST NO.	W443-1577-SL	
APPLICABLE MODEL	PM4106112	
SPECIFICATION	NO. OF PHASE	1 PHASE
	NO. OF POLE	4 P.
	RATED RPM.	50Hz 1370/1165/890 60Hz ---
	VOLTAGE	240 V.
	CURRENT	1.20 A.
WINDING RESISTANCE	OUTPUT	130 W.
	EFFICIENCY	51.6 %
	M COIL	46.48 Ω
	S COIL	149.83 Ω
(REF. 20")	SP1 COIL	29.64 Ω
	SP2 COIL	29.64 Ω
THERMAL PROTECTOR	17AM - 150°C Refer P/N.R330-0035	
INSULATION CLASS	B	
METHOD OF COOLING	A.O.M.	
DEGREE OF PROTECTION	IP21	
WEIGHT	4.43 KGS.	



STICKER RCG

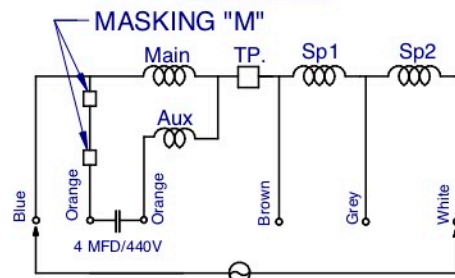

Remark : Part No. Capacitor R330-5427

- Notes :
1. After the motor is complete, applied rust proof oil at shaft end.
 2. The tensile strength of each lead wire at least 4 Kgs.
 3. The runout of the shaft end circumference 0.16 mm.


RCT85-1304DS-ODP-C02

0.13kW , 4P , 1.2Amp	Cap. 4 mfd	Frame 48
240V , 1Ph , 50Hz	Rating Cont	Mounting Res.mt
Rpm 1370/1165/890	Ins. Class B	Serial No. xxxxxxxxxx

NAMEPLATE


WARNING

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING



DIAGRAM

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.



NON SCALES

FINISH:	DESCRIPTION:	REFER TO :
ASSEMBLY	MOTOR OUTLINE	ECN No.7321 ECN No.7495
ROYCECROSS	Q'TY 1	APPLICATION INDOOR MOTOR
		Group Code: FF85B