


Lead Multi core cable (VDE NSW23477 60245 H07RN-F 3G1.0 mm<sup>2</sup>) NBR Black  
Lead wire length 1950 ± 25 mm.



<b>NAMEPLATE</b>			
Cap.	6 mfd	Frame	48
Rating	Cont	Mounting	Nil
Ins. Class	B	Serial No.	DDMMYYXXXX

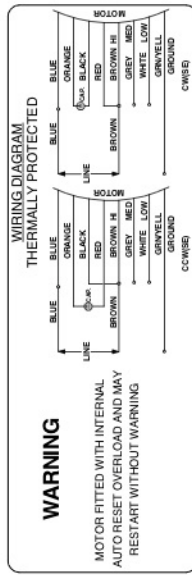


THIS DRAWING MAY BE USED IN WHOLE OR PART PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

THIRD ANGLE PROJECTION	FINISH:	DESCRIPTION:	REFER TO :
	ASSEMBLY	MOTOR OUTLINE	ECN No.9170
NON	CUSTOMER:	QTY APPLICATION	Group Code:
SCALES	ROYCECROSS	1 OUTDOOR MOTOR	FF85B

Remark : Part No. Capacitor R330-5826

- Notes :
1. After the motor is complete, applied rust proof oil at shaft end.
  2. The tensile strength of each lead wire at least 4 Kgs.
  3. The runout of the shaft end circumference 0.08 mm.

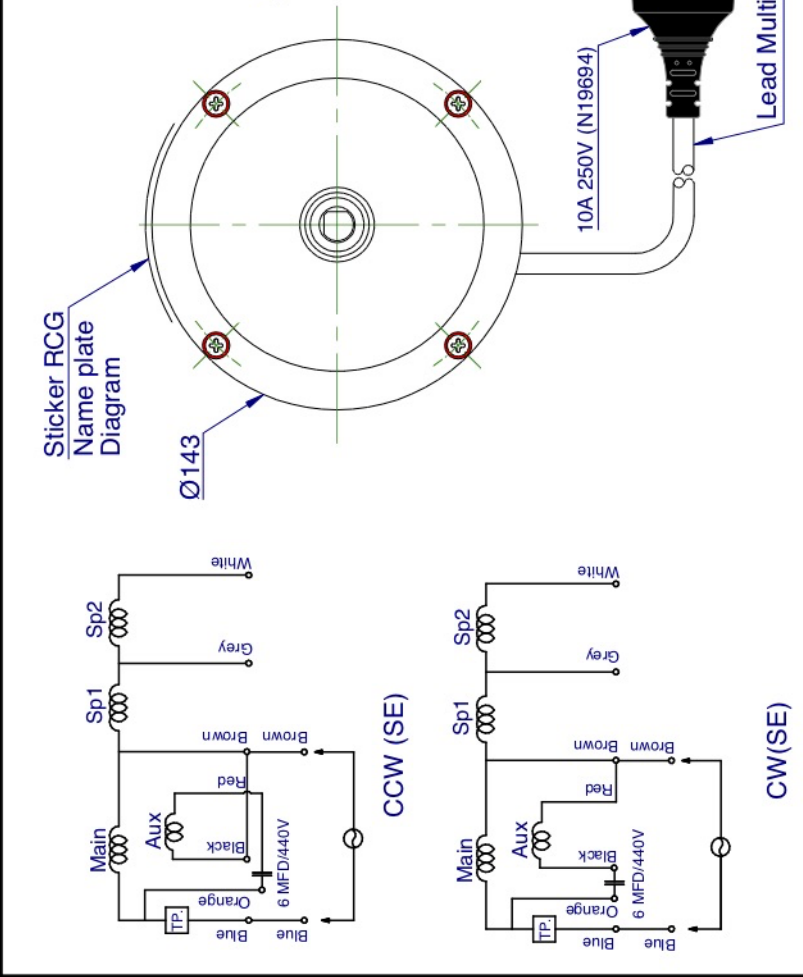

DATA TEST NO.	W443-1928-SL
APPLICABLE MODEL	PM310576 A1
NO. OF PHASE	1 PHASE
NO. OF POLE	6 P.
RATED RPM.	50Hz 900/800/650 60Hz ---
VOLTAGE	240 V.
CURRENT	1.20 A.
OUTPUT	150 W.
M COIL	32.49 Ω
S COIL	78.80 Ω
SP1 COIL	19.03 Ω
SP2 COIL	19.03 Ω
THERMAL PROTECTOR	17AM - 150°C Refer P/N.R330-0035
INSULATION CLASS	B
METHOD OF COOLING	A.O.M.
DEGREE OF PROTECTION	IP55
WEIGHT	6.33 KGS.