


DATA TEST NO.	W443-1528-SL	
APPLICABLE MODEL	PM4104230	
SPECIFICATION	NO. OF PHASE	1 PHASE
	NO. OF POLE	6 P.
	RATED RPM.	50Hz 890/710/520 60Hz ---
	VOLTAGE	240 V.
	CURRENT	2.00 A.
WINDING RESISTANCE	OUTPUT	200 W.
	M COIL	17.04 Ω
	S COIL	104.14 Ω
	SP1 COIL	16.62 Ω
(REF. 20")	SP2 COIL	16.62 Ω
THERMAL PROTECTOR	17AM - 150°C Refer P/N.R330-0035	
INSULATION CLASS	B	
METHOD OF COOLING	A.O.M.	
DEGREE OF PROTECTION	IP21	
WEIGHT	7.30 KGS.	



STICKER RCG

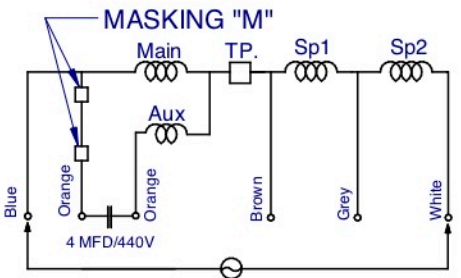

Remark : Part No. Capacitor R330-5427  
 Notes :  
 1. After the motor is complete, applied rust proof oil at shaft end.  
 2. The tensile strength of each lead wire at least 4 Kgs.  
 3. The runout of the shaft end circumference 0.18 mm.

<b>RCT85-2006DS-ODP-C02</b>					
0.20kW , 6P , 2.0Amp	Cap.	4 mfd	Frame	48	
240V , 1Ph , 50Hz	Rating	Cont	Mounting	Res.mt	
Rpm 890/710/520	Ins. Class	B	Serial No.	DDMMYYXXXX	

NAMEPLATE


**WARNING**

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

WIRING DIAGRAM THERMALLY PROTECTED

DIAGRAM

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

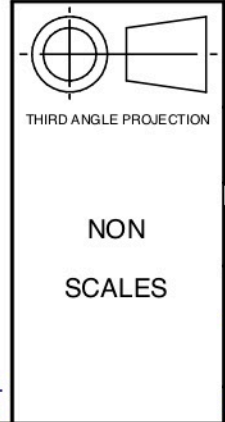

FINISH:	DESCRIPTION:	REFER TO :
ASSEMBLY	MOTOR OUTLINE	ECN No.8354
ROYCECROSS	Q'TY 1	APPLICATION INDOOR MOTOR
		Group Code: FF85B