


RC T85-2506S-TE-M02T			
0.25kW, 6P, 0.95Amp	Cap.	mfd	48
415V, 3Ph, 50Hz	Rating	Cont	Nil
P4pm 900	Ins. Class	B	Serial No. xxxxxxxxxxxx



NAMEPLATE

THIS DRAWING MAY BE USED IN WHOLE OR PART, PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

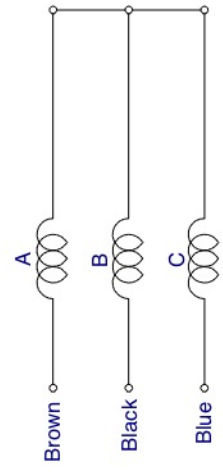

ROTATION : CW,CCW (LE)

- Notes :
1. After the motor is complete, applied rust proof oil at shaft end.
 2. The tensile strength of each lead wire at least 4 Kgs.
 3. The runout of the shaft end circumference 0.08 mm.

DATA TEST NO.	W443-1548-SL
APPLICABLE MODEL	PM310381 A1
NO. OF PHASE	3 PHASE
NO. OF POLE	6 P.
RATED RPM.	50Hz 900 60Hz ---
VOLTAGE	415 V.
CURRENT	0.95 A.
OUTPUT	250 W.
EFFICIENCY	61.9 %
BROWN-BLACK LEAD	71.12 Ω
BLACK-BLUE LEAD	71.12 Ω
BROWN-BLUE LEAD	71.12 Ω
(REF. 20')	
INSULATION CLASS	B
METHOD OF COOLING	A.O.M.
DEGREE OF PROTECTION	IP54
WEIGHT	6.30 KGS.

FINISH:	DESCRIPTION:	REFER TO :
ASSEMBLY	MOTOR OUTLINE	ECN No.7321
CUSTOMER:	Q'TY	ECN No.7495
ROYCECROSS	1	Group Code:
DESIGNED/CHECKED/APPROVED	UNIT	FF85B
THANATCHA SUKSAN	APPLICATION	
30/10/12 30/10/12	OUTDOOR MOTOR	
30/10/12	mm.	