


DATA TEST NO.	W443-2067-SL	
APPLICABLE MODEL	PM3102273 A1	
SPECIFICATION	NO. OF PHASE	1 PHASE
	NO. OF POLE	6 P.
	RATED RPM.	50Hz 840/770/690 60Hz ---
	VOLTAGE	240 V.
	CURRENT	2.97 A.
OUTPUT	370 W.	
WINDING RESISTANCE	M COIL	10.71 Ω
	S COIL	17.82 Ω
	SP1 COIL	3.56 Ω
	SP2 COIL	3.56 Ω
(REF. 20")		
THERMAL PROTECTOR	17AM - 150°C Refer P/N.R330-0035	
INSULATION CLASS	B	
METHOD OF COOLING	A.O.M.	
DEGREE OF PROTECTION	IP44	
WEIGHT	10.23 KGS.	



STICKER RCG

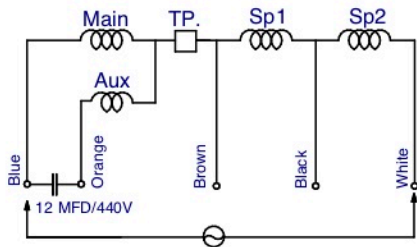


- Notes :
1. After the motor is complete, applied rust proof oil at shaft end.
 2. The tensile strength of each lead wire at least 4 Kgs.
 3. The runout of the shaft end circumference 0.10 mm.

RCT85-3706MS-TE-M05			
0.37kW , 6P , 2.97Amp	Cap.	12 mfd	Frame 48
240V , 1Ph , 50Hz	Rating	Cont	Mounting Nil
Rpm 840/770/690	Ins. Class	B	Serial No. DDDMYXXXX

NAMEPLATE

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.



THIRD ANGLE PROJECTION

NON
SCALES

WARNING

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

WIRING DIAGRAM THERMALLY PROTECTED

DIAGRAM

FINISH:	DESCRIPTION:	REFER TO :
ASSEMBLY	MOTOR OUTLINE	ECN No.8354
ROYCECROSS	Q'TY 1	APPLICATION INDOOR MOTOR
		Group Code: FF85B