


STICKER RCG


RCT85-3706S-TE-M02T-F					
0.37kW , 6P , 1.1/2.3Amp	Cap.	- mfd	Frame	48	
415/240V , 3Ph , 50Hz	Rating	Cont	Mounting	Nil	
Rpm 890	Ins. Class	F	Serial No.	DDMMYYXXXX	

NAMEPLATE

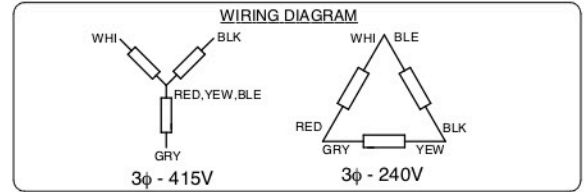

DIAGRAM


DATA TEST NO.	W443-2183-SL			
APPLICABLE MODEL	PM3102395			
SPECIFICATION	NO. OF PHASE	3 PHASE		
	NO. OF POLE	6 P.		
	RATED RPM.	50Hz	890	
		60Hz	---	
	VOLTAGE	415/240 V.		
CURRENT	1.1/2.3 A.			
OUTPUT	370 W.			
WINDING RESISTANCE	WHITE-RED LEAD	20.32	Ω	
	GREY-YELLOW LEAD	20.32	Ω	
	BLACK-BLUE LEAD	20.32	Ω	
(REF. 20")				
INSULATION CLASS	F			
METHOD OF COOLING	A.O.M.			
DEGREE OF PROTECTION	IP54			
WEIGHT	7.20 KGS.			

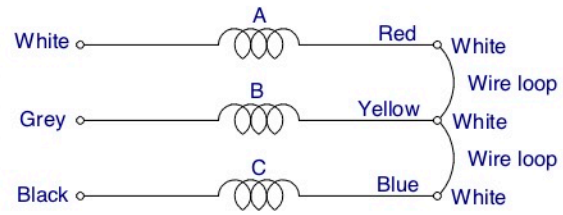

ROTATION : CW,CCW (LE)

- Notes :
1. After the motor is complete, applied rust proof oil at shaft end.
 2. The tensile strength of each lead wire at least 4 Kgs.
 3. The runout of the shaft end circumference 0.08 mm.

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

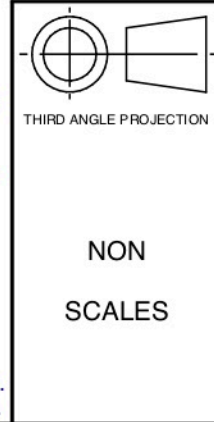

FINISH:	DESCRIPTION:		REFER TO :
ASSEMBLY	MOTOR OUTLINE		QR2845
	Q'TY	APPLICATION	ECN No.9092
ROYCECROSS	1	OUTDOOR MOTOR	Group Code:
			FF85B