


DATA TEST NO.			W443-1588-SL
APPLICABLE MODEL			PM4120261
SPECIFICATION	NO. OF PHASE		1 PHASE
	NO. OF POLE		6 P.
	RATED RPM.	50Hz	900/800/600
		60Hz	---
	VOLTAGE		240 V.
	CURRENT		0.45 A.
OUTPUT		40 W.	
WINDING RESISTANCE (REF. 20°)	M COIL		183.86 Ω
	S COIL		185.46 Ω
	SP1 COIL		44.88 Ω
	SP2 COIL		89.77 Ω
THERMAL PROTECTOR			17AM - 150°C Refer P/N.R330-0035
INSULATION CLASS			B
METHOD OF COOLING			A.O.M.
DEGREE OF PROTECTION			IP54
WEIGHT			4.34 KGS.



STICKER RCG

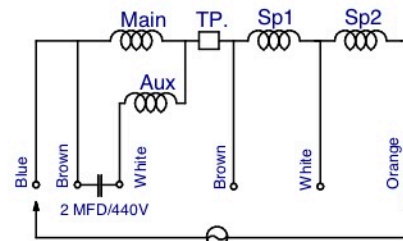

Remark : Part No. Capacitor R330-5585

Notes :

1. After the motor is complete, applied rust proof oil at shaft end.
2. The tensile strength of each lead wire at least 4 Kgs.
3. The runout of the shaft end circumference 0.22 mm.


RCT85-406DS-TE-C02

0.04kW , 6P , 0.45Amp	Cap.	2 mfd	Frame	48
240V , 1Ph , 50Hz	Rating	Cont	Mounting	Res.mt
Rpm 900/800/600	Ins. Class	B	Serial No.	DDMMYYXXXX

NAMEPLATE


WARNING

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING



DIAGRAM

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.



THIRD ANGLE PROJECTION

NON
SCALES

FINISH:	DESCRIPTION:	REFER TO :
ASSEMBLY	MOTOR OUTLINE	ECN No.8354
ROYCECROSS	Q'TY 1	APPLICATION INDOOR MOTOR
		Group Code: FF85B