


DATA TEST NO.	W443-1279-SL	
APPLICABLE MODEL	PM330435 A1	
SPECIFICATION	NO. OF PHASE	1 PHASE
	NO. OF POLE	4 P.
	RATED RPM.	50Hz 1200/1100/1000 60Hz ---
	VOLTAGE	240 V.
	CURRENT	4.40 A.
OUTPUT	600 W.	
WINDING RESISTANCE	M COIL	6.73 Ω
	S COIL	26.17 Ω
	SP1 COIL	1.05 Ω
	SP2 COIL	1.05 Ω
(REF. 20")		
THERMAL PROTECTOR	17AM - 150°C Refer P/N.R330-0035	
INSULATION CLASS	B	
METHOD OF COOLING	A.O.M.	
DEGREE OF PROTECTION	IP20	
WEIGHT	8.73 KGS.	



STICKER RCG

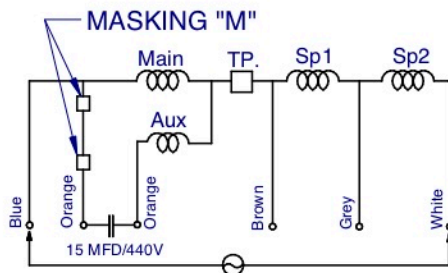

Remark : Part No. Capacitor R330-4099


- Notes :
1. After the motor is complete, applied rust proof oil at shaft end.
 2. The tensile strength of each lead wire at least 4 Kgs.
 3. The runout of the shaft end circumference 0.10 mm.

RCT85-5504S-ODP-B02					
0.60kW , 4P , 4.4Amp	Cap.	15 mfd	Frame	48	
240V , 1Ph , 50Hz	Rating	Cont	Mounting	Res.mt	
Rpm 1200/1100/1000	Ins. Class	B	Serial No.	DDMMYYXXXX	

NAMEPLATE


WARNING

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING



DIAGRAM

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.



THIRD ANGLE PROJECTION

NON SCALES

FINISH:	DESCRIPTION:	REFER TO :
ASSEMBLY	MOTOR OUTLINE	ECN No.8354
CUSTOMER:	Q'TY	APPLICATION
ROYCECROSS	1	INDOOR MOTOR
		Group Code:
		FF85B