


DATA TEST NO.	W443-1278-SL	
APPLICABLE MODEL	PM4304141	
SPECIFICATION	NO. OF PHASE	1 PHASE
	NO. OF POLE	4 P.
	RATED RPM.	50Hz 1330/1280/1220 60Hz ---
	VOLTAGE	240 V.
WINDING RESISTANCE	CURRENT	4.00 A.
	OUTPUT	600 W.
	M COIL	6.73 Ω
	S COIL	26.17 Ω
(REF. 20")	SP1 COIL	1.05 Ω
	SP2 COIL	1.05 Ω
THERMAL PROTECTOR	17AM - 150°C Refer P/N.R330-0035	
INSULATION CLASS	B	
METHOD OF COOLING	A.O.M.	
DEGREE OF PROTECTION	IP20	
WEIGHT	10.49 KGS.	



STICKER RCG

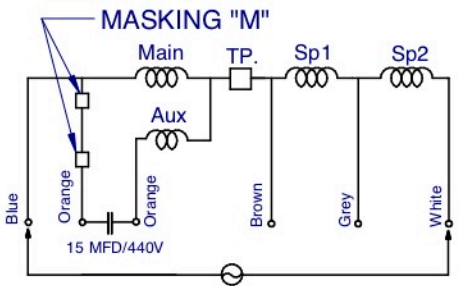

Remark : Part No. Capacitor R330-4099

Notes :

1. After the motor is complete, applied rust proof oil at shaft end.
2. The tensile strength of each lead wire at least 4 Kgs.
3. The runout of the shaft end circumference 0.22 mm.

RCT85-6004DS-ODP-C02R					
0.60kW , 4P , 4.0Amp	Cap.	15 mfd	Frame	48	
240V , 1Ph , 50Hz	Rating	Cont	Mounting	Res.mt	
Rpm 1330/1280/1220	Ins. Class	B	Serial No.	DDMMYYXXXX	

NAMEPLATE

WARNING

MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

DIAGRAM

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

THIRD ANGLE PROJECTION	FINISH:	DESCRIPTION:		REFER TO :
	ASSEMBLY	MOTOR OUTLINE		PM430492 ECN No.9119
	ROYCECROSS	Q'TY	APPLICATION	Group Code:
NON SCALES	1	INDOOR MOTOR	FF85B	