


3-Lead AWG-20 UL1015 @ 750 ± 30 mm.  
Brown/Black/Blue  
With Utilux terminal H25905ET & Utilux sleeve H30013  
Ground wire AWG-18 UL1015 @ 750 ± 30 mm.  
With Utilux terminal H25905ET & Utilux sleeve H30013

DATA TEST NO.	W443-1024-SL	
APPLICABLE MODEL	PM330459 A1	
SPECIFICATION	NO. OF PHASE	1 PHASE
	NO. OF POLE	4 P.
	RATED RPM.	50Hz 1320 60Hz ---
	VOLTAGE	240 V.
	CURRENT	5.5 A.
OUTPUT	600 W.	
EFFICIENCY	57.4 %	
WINDING RESISTANCE (REF. 20")	M COIL	6.73 Ω
	S COIL	26.17 Ω
	SP1 COIL	--- Ω
	SP2 COIL	--- Ω
THERMAL PROTECTOR	17AM - 150°C Refer P/N.R330-0035	
INSULATION CLASS	B	
METHOD OF COOLING	A.O.M.	
DEGREE OF PROTECTION	IP20	
WEIGHT	8.58 KGS.	



STICKER RCG



- Notes :
1. After the motor is complete, applied rust proof oil at shaft end.
  2. The tensile strength of each lead wire at least 4 Kgs.
  3. The runout of the shaft end circumference 0.10 mm.

<b>RCT85-6004S-ODP-B02BR</b>				
0.60kW, 4P, 5.5Amp, 1320Rpm, Cap. 15 mfd, wheel 9"x7"				
0.75kW, 4P, 7.9Amp, 1090Rpm, Cap. 20 mfd, wheel 10"x10"				
Frame	48	Rating	Cont	Mounting Res. mt
240V, 1Ph, 50Hz		Ins. Class	B	Serial No. xxxxxxxxxx


NAMEPLATE

**WARNING**  
MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

WIRING DIAGRAM  
THERMALLY PROTECTED

DIAGRAM

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

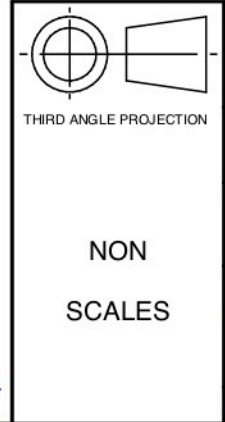

FINISH:	DESCRIPTION:	REFER TO :
ASSEMBLY	MOTOR OUTLINE	ECN No.7495
ROYCECROSS	Q'TY 1	APPLICATION INDOOR MOTOR
		Group Code: FF85B