

Remark : Grease All via RLQ2 -25~120 L owoise


DAT TEST NO.		W443-2353-SL	
APPLICAB LMODEL		PM3100211	
SPECIFICATION	NO. OF PHASE	1 PHASE	
	NO. OF POLE	4 P.	
	RATED RPM	50H	1370
		60H	--z
	VOLTAGE	240 V.	
	CURRENT	5.10 A.	
	OUTPUT	75 W.	
WINDING RESISTANCE (REF 20°)	M COIL	4.40	Ω
	S COIL	10.17	Ω
	S1 COIL	--	Ω
	S2 COIL	--	Ω
THERMAL PROTECTOR		17AM - 150°C Refer P/N.R330-0035	
INSULATION CLASS		B	
METHOD OF COOLING		A.O.M.	
DEGREE OF PROTECTION		IP54	
WEIGHT		-- KGS.	



STICKER RCG

RCT85-7504S-TE-F04			
0.75kW, 4P, 5.10Amp	Cap. 20 mfd	Frame 48	
240V, 1Ph, 50Hz	Rating Cont	Mounting Pad	
Rpm 1370	Ins. Class B	Serial No. xxxxxxxxxx	

NAMEPLATE

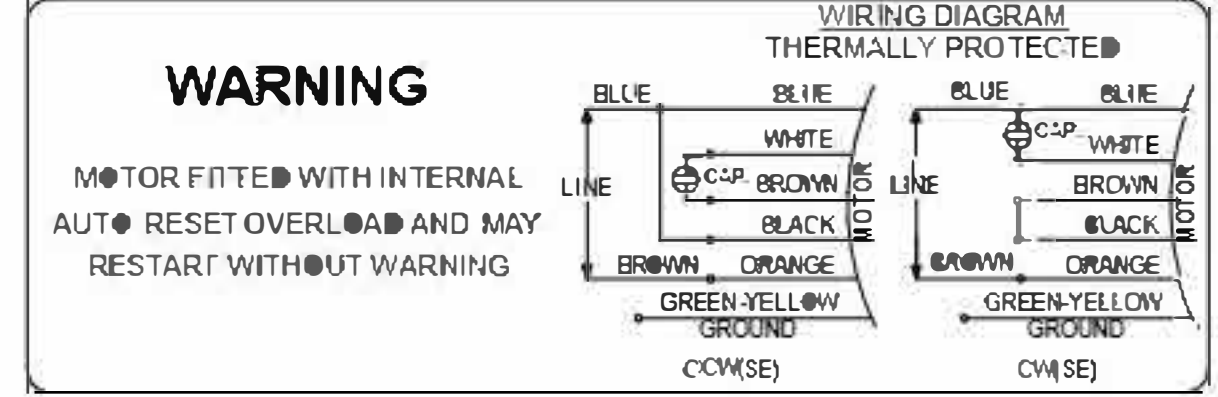

DIAGRAM

Remark : Part No. Capacitor R330-4102

- Notes :
1. After the motor is complete, applied rust proof oil at shaft end.
 2. The tensile strength of each lead wire at least 4 Kgs.
 3. The runout of the shaft end circumference 0.08 mm.

THIS DRAWING MAY BE USED IN WHOLE OR PART PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

<p>THIRD ANGLE PROJECTION</p>	FINISH		REFERT C		
	ASSEMBLY		MOTOR OUTLINE		
	CUSTOMER		QTY	APPLICATION	Group Code:
	ROYCECROSS		1	OUTDOOR MOTOR	FF85B
DRAWN	DESIGNED	CHECKED	APPROVED	UNIT	
ASSANEE	KITTISAK	WEERAPAN	WEERAPAN	mm.	
15/12/15	15/12/15	15/12/15	15/12/15		
S tora location ; H:\ Appl DWG \Outline\FF85B					
				Rev.No.	
				1	
				Sheet :	
				1 of 2	