


DATA TEST NO.	W443-2243-SL	
APPLICABLE MODEL	PM3200048	
SPECIFICATION	NO. OF PHASE	1 PHASE
	NO. OF POLE	4 P.
	RATED RPM.	50Hz 1400/850 60Hz ---
	VOLTAGE	240 V.
	CURRENT	8.09 A.
WINDING RESISTANCE (REF. 20°)	M COIL	2.39 Ω
	S COIL	4.60 Ω
	SP1 COIL	5.08 Ω
	SP2 COIL	---- Ω
THERMAL PROTECTOR	T16094-11 135°C Refer P/N.R330-8514	
INSULATION CLASS	B	
METHOD OF COOLING	DPFC	
DEGREE OF PROTECTION	IP20	
WEIGHT	21.58 KGS.	



STICKER RCG




BOARD TERMINAL

- Notes :
1. After the motor is complete, applied rust proof oil (Caltex oil) at shaft end.
 2. The tensile strength of each lead wire at least 4 Kgs.
 3. The runout of the shaft end circumference 0.08 mm.

RCT90-11204S-ODP-A02			
1120/305W , 4P, 6.0Amp	Cap. 30 mfd	Frame 56	
240V , 1Ph , 50Hz	Rating Cont	Mounting Cradle	
Rpm 1400/850	Ins. Class B	Serial No.DDMMYYxxxx	
WARNING			
MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING			

NAMEPLATE

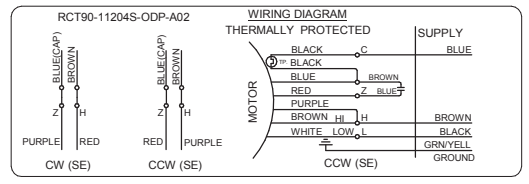

DIAGRAM

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

THIRD ANGLE PROJECTION	FINISH:	DESCRIPTION:	REFER TO :
	ASSEMBLY	MOTOR OUTLINE	QR2877
	CUSTOMER:	Q'TY	APPLICATION
	ROYCECROSS	1	INDOOR MOTOR
	ASSANEE	KITTISAK	EKAPHOP
04/01/17	04/01/17	04/01/17	04/01/17
NON	SCALES	UNIT	mm.
Storage Location ; H:\Appd DWG\Outline\FF90/100B			Rev.No. 3
			Sheet : 1 of 2