



**RCT90-5504S-ODP-A02**

550W , 4P , 3.3Amp	Cap. 20 mfd	Frame 56
240V , 1Ph , 50Hz	Rating Cont	Mounting Cradle
Rpm 1400	Ins. Class B	Serial No. DDMYYxxxx

**WARNING**  
MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

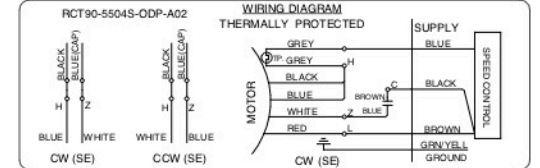

DATA TEST NO.	W443-2244-SL
APPLICABLE MODEL	PM3304113
SPECIFICATION	NO. OF PHASE 1 PHASE
	NO. OF POLE 4 P.
	RATED RPM. 50Hz 1400 60Hz ---
	VOLTAGE 240 V.
	CURRENT 3.43 A.
OUTPUT 560 W.	
WINDING RESISTANCE	M COIL 4.64 $\Omega$
	S COIL 6.44 $\Omega$
	SP1 COIL --- $\Omega$
	SP2 COIL --- $\Omega$
(REF. 20")	
THERMAL PROTECTOR	17AM - 150°C Refer P/N.R330-0035
INSULATION CLASS	B
METHOD OF COOLING	DPFC
DEGREE OF PROTECTION	IP20
WEIGHT	15.96 KGS.

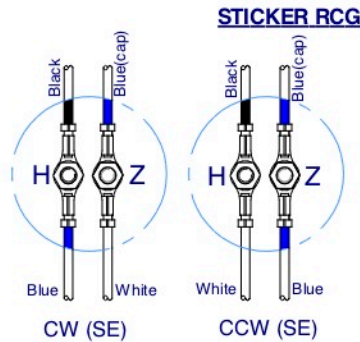

**BOARD TERMINAL**

- Notes :
1. After the motor is complete, applied rust proof oil (Caltex oil) at shaft end.
  2. The tensile strength of each lead wire at least 4 Kgs.
  3. The runout of the shaft end circumference 0.08 mm.

**NAMEPLATE**

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

THIRD ANGLE PROJECTION

NON SCALES

FINISH:	DESCRIPTION:	REFER TO :
ASSEMBLY	MOTOR OUTLINE	QR2886
		ECN No.8354,8423
Q'TY	APPLICATION	Group Code:
1	INDOOR MOTOR	FF90/100B