


**CUSTOMER APPROVAL**  
BY.....  
DATE.....

Remark : Grease Alvania RLQ2 -25--+120 Low noise


DATA TEST NO.	W443-2395-SL	
APPLICABLE MODEL	PM3100223	
SPECIFICATION	NO. OF PHASE	1 PHASE
	NO. OF POLE	4 P.
	RATED RPM.	50Hz 1410/1100/900 60Hz ---
	VOLTAGE	240 V.
	CURRENT	4.54 A.
WINDING RESISTANCE (REF. 20°)	M COIL	7.25 Ω
	S COIL	5.06 Ω
	SP1 COIL	1.05 Ω
	SP2 COIL	1.05 Ω
THERMAL PROTECTOR	17AM - 140°C Refer P/N.R330-9048	
INSULATION CLASS	F	
METHOD OF COOLING	DPFC	
DEGREE OF PROTECTION	IP20	
WEIGHT	18.20 KGS.	

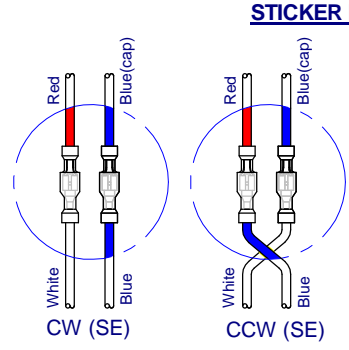

**BOARD TERMINAL**

- Notes :
1. After the motor is complete, applied rust proof oil (Caltex oil) at shaft end.
  2. The tensile strength of each lead wire at least 4 Kgs.
  3. The runout of the shaft end circumference 0.08 mm.

<b>RCT90-7504S-ODP-A023</b>			
750W , 4P, 4.54Amp	Cap. 30 mfd	Frame 56	
240V , 1Ph , 50Hz	Rating Cont	Mounting Cradle	
Rpm 1410/1100/900	Ins. Class F	Serial No. DDMYYXXXX	
<b>WARNING</b>			
MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING			

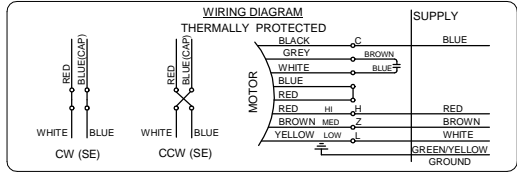

**NAMEPLATE**      **DIAGRAM**

THIS DRAWING MAY BE USED IN WHOLE OR PART ,PROVIDED THE PIONEER MOTOR NAME & LOGO ARE VISIBLE IN ANY REPRODUCTION.

<p>THIRD ANGLE PROJECTION</p> <p>NON SCALES</p>	<b>ROYCE CROSS GROUP</b>			
	FINISH:		DESCRIPTION:	
	ASSEMBLY		MOTOR OUTLINE	
	CUSTOMER:		Q'TY	APPLICATION
	ROYCECROSS		1	INDOOR MOTOR
		UNIT	DWG.&Part No.	
		mm.	RCT90-7504S-ODP-A023	
Storage Location ; H:Appd DWG/Outline/FF90/100B			Rev.No.	
			1	
			Sheet :	
			1 of 2	

REFER TO :  
QR3210  
ECN No.8770

Group Code:  
FF90/100B

Rev.No.  
1

Sheet :  
1 of 2